


G. A. DRG.

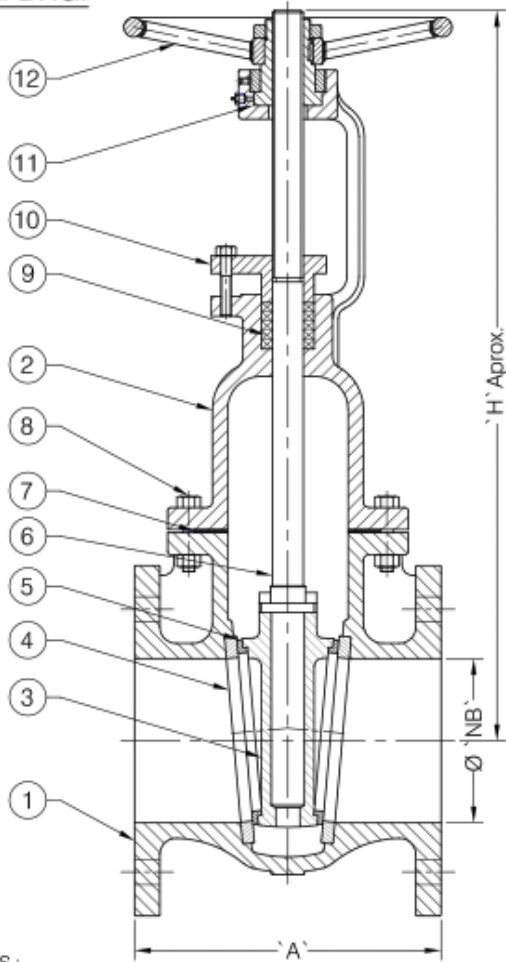

NOTES :-

1. FLANGE DRILLING AS REQUIREMENT
2. ABOVE DIMENSIONS ARE SUBJECTED TO SPECIFIED TOLERANCE

No.	NB	A	D	Ø H
01	25	127	130	215
02	40	140		
03	50	215	225	380
04	65	230	225	410
06	80	230	225	440
07	100	255	320	540
08	125	266	320	605
09	150	280	320	660
10	200	318	360	830
11	250	355	396	1005
12	300	380	405	1025

12	HAND WHEEL	CAST IRON / MALLEABLE IRON
11	YOKE SLEEVE	C.I. IS : 210 Gr. 220
10	GLAND	C.I. IS : 210 Gr. 220
9	GLAND PACKING	GRAPHITED ASBESTOS
8	NUT & BOLT	CARBON STEEL IS : 1363 / 67
7	GASKET	AMJ 321 CAF
6	SPINDLE	AISI 410
5	WEDGE RING	S S 304/410
4	BODY RING	S S - 304/410
3	WEDGE	
2	BONNET	C.I. IS: 210 Gr. FG 220
1	BODY	
No.	DESCRIPTION	MATERIAL

**MATERIAL & DESCRIPTIONS**

NOTE :- ALL DIMENSIONS ARE IN mm

TITLE :-

PROJ :-



**RISING SPINDLE SLUICE VALVE**  
(FLANGE ENDS)

DRN BY	L.B.G.
CHECK BY	A.R.D.
APPD BY	R. E. D.
SCALE	N.T.S.
DATE	17.04.2009

**SPECIFICATION OF STANDARDS**

DESIGN	IS : 780
CLASS	1
TESTS PRESSURE (Kg / Cm <sup>2</sup> )	
	HYDROSTATIC
BODY	20
SEAT	10
DRG. No.	DV / RSV / PN -1 / B / 01
REV. No.	0



**Dalsons Valves**

D- 58, MIDC MIRAJ BLOCK MIRAJ  
DIST - SANGLI ( M.S. ) INDIA